



UNITED STATES PATENT AND TRADEMARK OFFICE

COPY

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/416,170	05/13/2003	Nigel Haig McLisky	7500 P1277-USA	7211

7590 08/24/2004

O M Zaghmout
Bio Intellectual Property Services
8509 Kernon Court
Lorton, VA 22079

EXAMINER

KJM, CHRISTOPHER S

ART UNIT PAPER NUMBER

3752

DATE MAILED: 08/24/2004



Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

10/416,170

Applicant(s)

MCLISKY, NIGEL HAIG

Examiner

Christopher S. Kim

Art Unit

3752

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 16 May 2003.
- 2a) ☐ This action is FINAL. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-16 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-16 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 16 May 0103 is/are: a) ☐ accepted or b) ☒ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☒ All b) ☐ Some * c) ☐ None of:
1. ☒ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

* See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- 1) ☒ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
- 3) ☒ Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
Paper No(s)/Mail Date 5/16/03.
- 4) ☐ Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____.
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: _____.

DETAILED ACTION

Drawings

1. The drawings are objected to under 37 CFR 1.83(a). The drawings must show every feature of the invention specified in the claims. Therefore, the "automatic" recited in claims 1 and 13; the "substantially vertically" recited in claims 2-4, 8, 10 and 12; the "vertical path of travel" recited in claim 15 must be shown or the feature(s) canceled from the claim(s). No new matter should be entered.

Corrected drawing sheets in compliance with 37 CFR 1.121(d) are required in reply to the Office action to avoid abandonment of the application. Any amended replacement drawing sheet should include all of the figures appearing on the immediate prior version of the sheet, even if only one figure is being amended. The figure or figure number of an amended drawing should not be labeled as "amended." If a drawing figure is to be canceled, the appropriate figure must be removed from the replacement sheet, and where necessary, the remaining figures must be renumbered and appropriate changes made to the brief description of the several views of the drawings for consistency. Additional replacement sheets may be necessary to show the renumbering of the remaining figures. The replacement sheet(s) should be labeled "Replacement Sheet" in the page header (as per 37 CFR 1.84(c)) so as not to obstruct any portion of the drawing figures. If the changes are not accepted by the examiner, the applicant will be notified and informed of any required corrective action in the next Office action. The objection to the drawings will not be held in abeyance.

Claim Rejections - 35 USC § 112

2. The following is a quotation of the second paragraph of 35 U.S.C. 112:

The specification shall conclude with one or more claims particularly pointing out and distinctly claiming the subject matter which the applicant regards as his invention.

3. Claim 1-16 is rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention.

The claims are generally narrative and indefinite, failing to conform with current U.S. practice. They appear to be a literal translation into English from a foreign document and are replete with grammatical and idiomatic errors.

Claim 1 recites the limitation "the dispenser can" in line 4. There is insufficient antecedent basis for this limitation in the claim.

Claim 2 recites the limitation "the first mentioned spray can" in lines 3-4. There is insufficient antecedent basis for this limitation in the claim.

Claim 2 is grammatically incorrect. Words appear to be missing between lines 4 and 5.

Claim 3 recites the limitation "the first mentioned spray can" in lines 3-4. There is insufficient antecedent basis for this limitation in the claim.

Claim 4 recites the limitation "the first mentioned spray can" in lines 3-4. There is insufficient antecedent basis for this limitation in the claim.

Art Unit: 3752

Above are examples and not a complete listing. Applicant is required to review and amend all of the claims in their entirety to ensure full compliance with 35 USC 112, second paragraph.

Claim Rejections - 35 USC § 102

4. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(b) the invention was patented or described in a printed publication in this or a foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States.

5. Claims 1-16 are rejected under 35 U.S.C. 102(b) as being anticipated by Ganzeboom (WO 95/29106).

Ganzeboom discloses a dispensing means comprising: an integral self contained automatic spray dispenser 4,5; a wall mountable housing 1.


Conclusion

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Christopher S. Kim whose telephone number is (703) 308-8336. The examiner can normally be reached on Monday - Thursday, 6:30 AM - 5:00 PM.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Michael Y. Mar can be reached on (703) 308-2087. The fax phone number for the organization where this application or proceeding is assigned is 703-872-9306.

Art Unit: 3752

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).



Christopher S. Kim
Primary Examiner
Art Unit 3752

CK

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for form 1449/PTO		Complete if Known	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Use as many sheets as necessary)		Application Number	
		Filing Date	
		First Named Inventor	McLisky, Nigel Haig
		Art Unit	
		Examiner Name	
Sheet 1	of 1	Attorney Docket Number	

U. S. PATENT DOCUMENTS					
Examiner Initials*	Cite No. ¹	Document Number	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
		Number-Kind Code ² (if known)			
[Signature]		US- 5397028	03-14-1995	Jesadanont	
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. ¹	Foreign Patent Document	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages Or Relevant Figures Appear	1*
		Country Code ³ Number ⁴ Kind Code ⁵ (if known)				
		DE 3902476 A	09-02-1990	Feldmuhle AG		
		FR 2717156 A	09-15-1995	Berger J M		
		FR 2523479 A	09-23-1983	Perales F		
		FR 2433983 A	04-25-1980	Esnault		
		FR 2292528 A	07-30-1976	Minois		

Examiner Signature	[Signature]	Date Considered	8/21/09
-----------------------	-------------	--------------------	---------

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with final communication to applicant. Applicant's unique citation designation number (optional). See Kinds Codes of USPTO Patent Documents at www.uspto.gov or MPEP 901.04. Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST. 18 if possible. Applicant is to place a check mark here if English language Translation is attached.

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.

Notice of References Cited

Application/Control No.

10/416,170

Applicant(s)/Patent Under
Reexamination
MCLISKY, NIGEL HAIG

Examiner

Christopher S. Kim

Art Unit

3752

Page 1 of 1

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
	A	US-			
	B	US-			
	C	US-			
	D	US-			
	E	US-			
	F	US-			
	G	US-			
	H	US-			
	I	US-			
	J	US-			
	K	US-			
	L	US-			
	M	US-			

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N	WO 95/29106	11-1995	PCT	Ganzeboom	---
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B65D 83/26	A1	(11) International Publication Number: WO 95/29106 (43) International Publication Date: 2 November 1995 (02.11.95)
<p>(21) International Application Number: PCT/NL95/00146</p> <p>(22) International Filing Date: 20 April 1995 (20.04.95)</p> <p>(30) Priority Data: 9400660 25 April 1994 (25.04.94) NL</p> <p>(71) Applicant (for all designated States except US): AVERYCK ENGINEERING CONSULTANTS B.V. [NL/NL]; Zonnelaan 4, NL-2012 TC Haarlem (NL).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): GANZEBOOM, Wilhelmus, Everhardus [NL/NL]; Zonnelaan 4, NL-2012 TC Haarlem (NL).</p> <p>(74) Agent: DE BRUIN, Leendert, C.; Nederlandsch Octrooibureau, Scheveningsweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).</p>	<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).</p> <p>Published With international search report.</p>	

(54) Title: DISPENSER FOR AN AEROSOL CAN

(57) Abstract

Dispenser to be fitted on the top of an aerosol can (4). In order to atomise a very small quantity of the contents of the aerosol can (4) at regular intervals by automated means, it is proposed to fit an attachment having an electrically operated valve (8) on the aerosol can (4). Operation of said valve (8) takes place via a controller which is supplied with power exclusively by photovoltaic means (2). In this way it is ensured that dispensing of the desired material takes place only in an environment where there is adequate light.

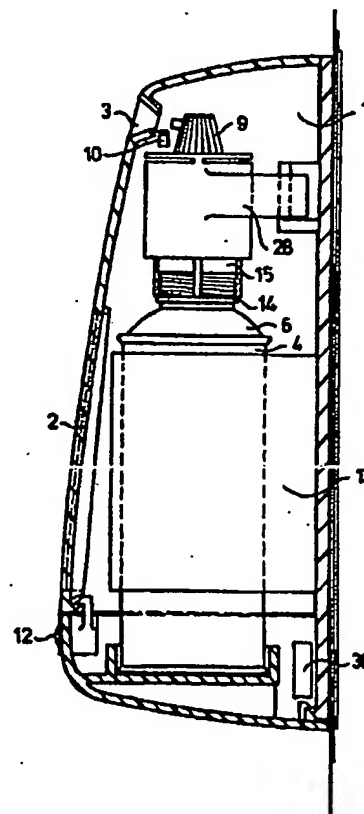

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KZ	Kazakhstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Dispenser for an aerosol can

The present invention relates to a dispenser according to the preamble of claim 1.

5 A dispenser of this type is generally known from the prior art. A device of this type is, for example, used in public toilets for periodic dispensing of an air freshener. Aerosol cans of this type are also used in greenhouses and other locations where a dosage of, for example, a herbicide has to be dispensed periodically.

10 Motor-driven systems are generally used in the prior art, which systems depress the conventional spray head of the aerosol can. Said motor-driven systems, together with the further circuitry and the aerosol can, are housed in a casing. The batteries for supplying the power for the control and drive of the motor are likewise located in said casing. In some embodi-
15 ments the aim is to make the life of the batteries equal to the life of the aerosol can or to make the battery life twice that of the aerosol can.

In US Patent 3,666,144 an attachment is described which is to be placed between the atomiser nozzle of an aerosol can and the aerosol can itself. A coil-operated valve is contained in said attachment. With this embodiment
20 the life of the batteries can be extended appreciably because current consumption is appreciably limited.

In practice this type of simultaneous use of the aerosol can and the batteries proves particularly difficult to realise. This means that either the aerosol can is not emptied completely or that the battery is not
25 exhausted at the time the aerosol can is changed. Moreover, it is necessary for maintenance staff to replace both the aerosol can and the batteries.

Some embodiments have indicators to display the number of times aerosol has been dispensed by the aerosol can or the residual power in the battery. This counting is ineffective if the aerosol can contains a greater or
30 lesser number of doses. One problem with the battery indicator is that as soon as the battery is virtually empty no further indication can be given of the contents of the aerosol can or the contents of the batteries themselves. That is to say, there is no clear indication for maintenance staff. A positive approach to this problem, that is to say allowing an indicator
35 to remain permanently lit if the battery is not yet empty, is found to consume a particularly high proportion of the battery charge and this approach is therefore also not desirable.

A further problem is that, especially in public toilets, a separate

circuit is needed to prevent a dosage also being dispensed during the night when the toilets are not in use. For this purpose it is necessary to set the time or to use a day/night sensor, which is complex and the reason why, in practice, devices of this type continue to run day and night, which
5 leads to wastage of the both the contents of the aerosol cans and of the batteries.

The aim of the present invention is to provide a dispenser which does not have the above disadvantages and operates only if the surroundings in which said device is located are in use and with which it is possible to
10 give a direct indication of whether or not the device is in operation. independently of other effects of the surroundings, even when the aerosol can is almost empty.

This aim is achieved with a dispenser as described above in having the characterizing features of claim 1.

15 Although the use of a photovoltaic or solar cell has been suggested before, a photovoltaic cell of this type has always been used in combination with an accumulator or other rechargeable battery having a relatively large capacity. This meant that such a solar cell served merely to keep the battery charged at the required level. A construction of this type is
20 described, for example, in Netherlands Patent Application 8102234 in the name of the Applicant.

The disadvantage of this construction was that a particularly large surface area of solar cell was needed to operate the electric motor for the fan which was used with this arrangement. Moreover, it is not simple to
25 make a differentiation between when the device is and is not in use, whilst, finally, there is no indication whatsoever as to whether a light level adequate for the solar cell is available. After all the accumulator used will be fully charged when it is installed. It will become clear only after some time that the accumulator used is discharging more energy to the
30 motor than is being charged by the solar cell. At that point in time the installers are no longer on site.

With the device according to the invention a relatively small solar cell can suffice as a result of the use of the attachment having the valve mounted therein. The effect of the direct power supply from the
35 photovoltaic cell and the accumulator, such as a capacitor, having a relatively small capacity to the valve is that no substantial dispensing takes place when, for example, the toilets are not in use, that is to say when the lights are off in the case of public toilets. Furthermore, the

installers can establish immediately at the time of installation whether or not there is adequate light by checking whether atomisation starts at the desired point in time.

The various features can be further optimised in that the controller is provided with an indicator showing the light intensity. That is to say that, for example, a light emitting diode or the like which is illuminated when there is adequate light is located on the casing of the dispenser. The optimum positioning of the casing and, more particularly, of the solar cell mounted thereon, can then be taken into account immediately at the time of installation.

Furthermore, sensor means to sense the condition of charge of the aerosol can can be present, which means are connected to the controller according to the invention. As a result, a light signal, for example, can be given if the charge level falls below a certain level, which, for example, corresponds to the empty state of the aerosol can. Because the lowering of the contents of the can does not proceed in parallel with the energy emitted by the solar cells, it can, in contrast to the case with constructions which have batteries which become exhausted, be assumed with reasonable certainty that if the indicator is out there are no problems, whilst problems are to be expected when the indicator comes on.

These sensing means can comprise several embodiments.

First of all it is possible to provide a pressure sensor which could be realised as a switch or other pressure sensitive element introduced in the aerosol can which will give a signal if the pressure in the aerosol can drops.

It is also possible to provide a gas sensitive switch near the outflow opening of the dispenser. If no gas or liquid from the aerosol can is sensed whilst the dispensing device is activated it can be concluded that the aerosol can is empty.

It is also possible to provide some kind of flap which is blown away by the discharging gas. Movement of this flap can be sensed. A further possibility is to provide a tube inside a coil which coil is connected with the aerosol can. In this tube a metal part is provided which will move because of the pressure of the aerosol can and will result in a change of induction of the coil.

However, preferably in the outflow opening a temperature sensitive device such as a resistance is provided. If the aerosol can is activated evaporated gas possibly comprising some evaporating liquid droplets move

along the resistance resulting in its cooling. This gas is evaporated in prior art aerosol cans in the area of the outflow tube extending from the top of the aerosol can to its bottom.

However, if the aerosol can is nearly empty the gas will already evaporate in the can itself. In that case the gas will have a considerably higher temperature than in the condition wherein the gas is only (partially) evaporated in the tube extending into the can to the dispensing opening.

It will be clear that such a sensing device cannot only be used in the dispenser according to the invention but in combination with any other prior art aerosol can in which it is necessary to have indication whether or not it is still filled.

Any device to be provided outside from the aerosol can has the advantage that it has not to be changed together with the aerosol can if this can is empty.

According to an advantageous embodiment of the invention, position sensor means are fitted close to the part coming into contact with the top of the aerosol can in order to ensure that there is a complete connection between the aerosol can and the attachment.

To prevent incorrect aerosol cans being used in combination with the attachment described above, coupling means which engage with one another can be fitted on both the attachment and the aerosol can.

As indicated above, the aerosol can can spray any agent which has to be dispensed periodically, such as air fresheners and herbicides.

The invention will be explained in more detail below with reference to an illustrative embodiment shown in the drawing. In the drawing:

Fig. 1 shows a perspective front view of the exterior of the device according to the invention;

Fig. 2 shows an exploded side view of the device according to the invention;

Fig. 3 shows a detail of the aerosol can in combination with the attachment according to the invention; and

Fig. 4 shows the circuit diagram for the electrical connections and control of the various components.

In Fig. 1, the holder for accommodating an aerosol can is indicated in its entirety by 1. A solar panel 2 is fitted on the front of said holder. There is also a dispensing orifice 3 for the medium to be dosed, and LED indicators 11, 12 are located on the lower side.

Fig. 2 shows an exploded side view of the holder. It can be seen that the holder comprises a retainer 13 for an aerosol can, as well as diverse snap-shut means, which are not shown in more detail, for fixing to a base plate, which initially is fixed to the wall shown in Fig. 1. Constructions of this type are generally known from the prior art. Accumulator 30 is connected to controller 25 which is not shown in this figure.

Retainer 13 is suitable for accommodating an aerosol can, only the upper part of which is shown in Fig. 3. The top 6 is designed to interact with an attachment 5, which is to be fixed thereto. This attachment 5 is shown in the exploded diagram in Fig. 3. It comprises, from bottom to top, an attachment/aerosol can coupling 14 and a valve housing 15, in which a coil housing 16 is accommodated. An electrically controllable coil 7, provided with lead 17, fits in coil housing 16. A propellant gas coupling 18 and a piston holder 19 are fitted inside coil 7. A valve 8, comprising a spring 20, piston 21, rubber seal 22 and piston housing 23, fits in the piston holder. A metal ring to intensify the magnetic field abuts piston housing 23. An O-ring 24 and pressure membrane 27 complete the valve device. A valve cover 28 interacts with the valve housing 15. On top of said valve cover 28 there is a dispensing nozzle 9 of the type generally known from the prior art. A temperature sensor 10 such as a NTC or PTC resistance can be fitted to be contacted with the gas flow from the aerosol can. This temperature sensor 10 is connected via lead 29 to the controller, which is not shown in more detail.

The electrical connections of various components are shown diagrammatically in Fig. 4. The coil 7 of the valve is connected via lead 17 to controller 25. The same applies in the case of temperature sensor 10, which is connected to the controller 25 via lead 29. Controller 25 is likewise electrically connected to a timer device 26 and to the photocell 2. LED indicators 11 and 12 are also connected to the controller 25. An accumulator such as a capacitor 30 is provided.

The device described above functions as follows:

The installer will take account of LED indicator 11 when positioning the holder, containing aerosol can and other components fitted therein, in the lighted area concerned. When connected with controller 25 and photocell 2, said LED indicator 11 is so designed that a signal is given if sufficient energy is generated by the photovoltaic cell 2. The charge condition of accumulator 30 is not taken into account. During installation, the installer can immediately check whether there is adequate light to guaran-

tee subsequent operation. It is, of course, also possible to dispense with said indicator and to use a light meter to carry out the various checks.

The device according to the invention is ready for use immediately after installation. Operation of the device is controlled by light emanating from the photovoltaic cell 2. The timer circuit 26 is actuated by this means. Depending on the time which has been preset or is to be set after installation, said timer circuit 26 sends a pulse, the length of which can likewise be set for, for example, a few tens of milliseconds, to controller 25. In response to said pulse, energy originating from both photovoltaic cell 2 and accumulator 30 is transmitted to the coil 7 of valve 8. By this means valve 8 is actuated so that a small quantity of gas escapes from aerosol can 4. Valve 8 functions in the same way as the construction described in US Patent 3,666,144.

If the area concerned is not in use, that is to say the light is switched off or it is nighttime, energy will no longer be produced by the photovoltaic cell. This means that the controller 25 will function as long as sufficient charge is provided in accumulator 30. This is designed for about two dispensing operations. After that controller 25 is no longer functioning and, therefore, even if the timer device 26 were to emit a further signal this would have no effect on the operation of the coil 7 of valve 8.

The temperature sensor 10 measures the temperature of the outflowing gas from the aerosol can. If this temperature rises below a preset 'too high' value, such as the temperature when the can is empty, the high temperature signal is processed by controller 25 such that LED indicator 12 gives a signal. Consequently an indication that the aerosol can 4 has to be changed is available for maintenance staff.

This is based on the idea that in the aerosol a tube extends from the bottom to the nozzle through which the product to be dispensed is expelled because of propulsing gas, such as propane or butene. Evaporation of the liquid propulsing gas occurs either in this tube or near the discharge opening of either the aerosol can or the dispensing device. Anyway the temperature of the gas giving the dispensing device will drop in temperature which is sensed by sensor 10.

However, if the aerosol can becomes empty the last part of the gas will evaporate in the can itself resulting in a lower temperature drop of the gas at the discharge opening of the dispenser which will be sensed by sensor 10. It has to be understood that such a sensing device can be used i

combination with any other dispensing device known in the prior art. A temperature drop in the filled condition of the aerosol can of about 20°C has been observed which is easy to sense.

Although the invention has been described above with reference to a preferred embodiment, it must be understood that numerous modifications can be made thereto without going beyond the scope of the present Application. For instance, it is possible to construct the valve/aerosol can coupling in such a way that, for example, an electrical connection is produced when the coupling is fitted correctly and a circuit is broken if said fitting is incorrect. In this way it is guaranteed that a dose is dispensed only when the fitting is correct. Moreover, the top of the aerosol can can be modified to make it possible to combine only specific types of aerosol cans with the attachment 5 according to the invention. Furthermore, the LED indicators can be replaced by audio indicators.

Claims

1. Dispenser for an aerosol can, comprising an attachment (5) which is to be placed on the top of the aerosol can and which is provided with a valve (8) operated by a coil and with dispensing means (9), the coil being
5 connected to a controller (25) having a timer circuit (26) and a power supply, characterised in that the power supply for the coil comprises photovoltaic means, and accumulator means (30) connected thereto, said accumulator means (30) having an effective capacity corresponding at maximum with the power required for five dispensing operations.
- 10 2. Dispenser according to claim 1, wherein the controller is provided with an indicator (11) indicating the light intensity.
3. Dispenser according to one of the preceding claims, wherein the attachment is provided with temperature sensor means (10) connected to the controller.
- 15 4. Dispenser according to one of the preceding claims, wherein the attachment is provided with pressure sensor means (10) connected to the controller.
5. Dispenser according to one of the preceding claims, wherein the attachment is provided with position sensor means close to the part coming
20 into contact with the top of the aerosol can.
6. Dispenser according to Claim 5, wherein the position sensor means comprise coupling means which engage with one another fitted both on the attachment and on the aerosol can.
7. Dispenser according to one of the preceding claims, wherein the
25 aerosol can contains an air freshener.
8. Dispenser according to one of Claims 1-6, wherein the aerosol can contains a pesticide, herbicide, fungicide or the like.

fig-1

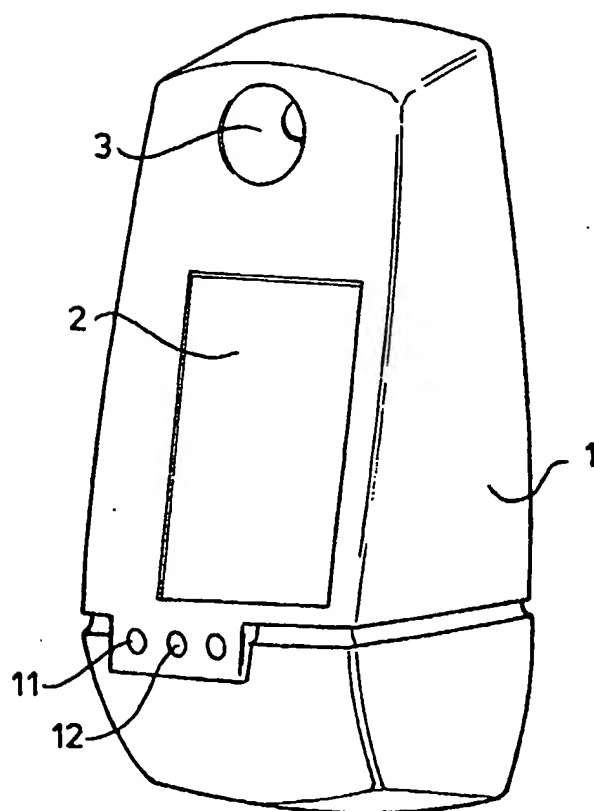


fig-2

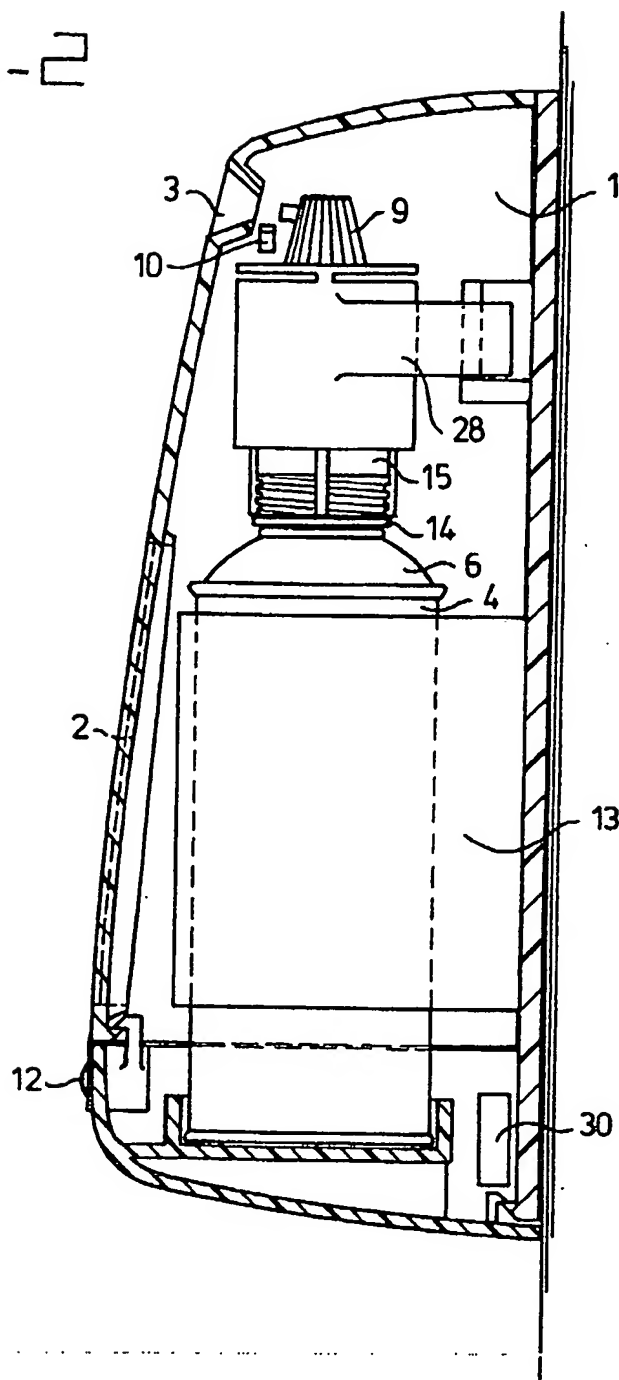


fig - 3


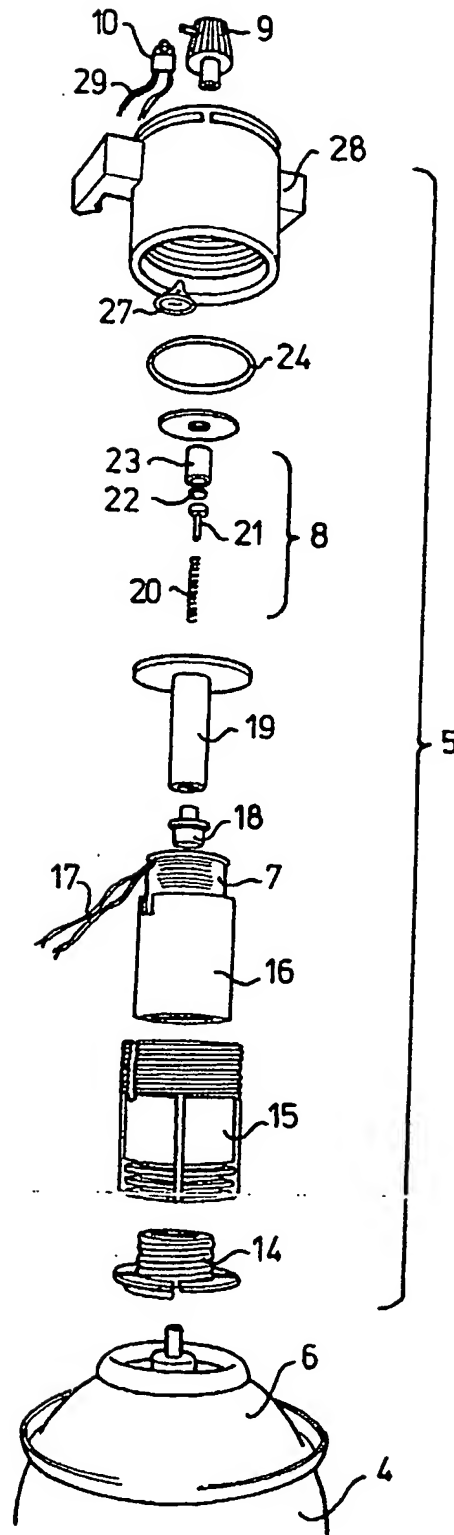


fig - 4

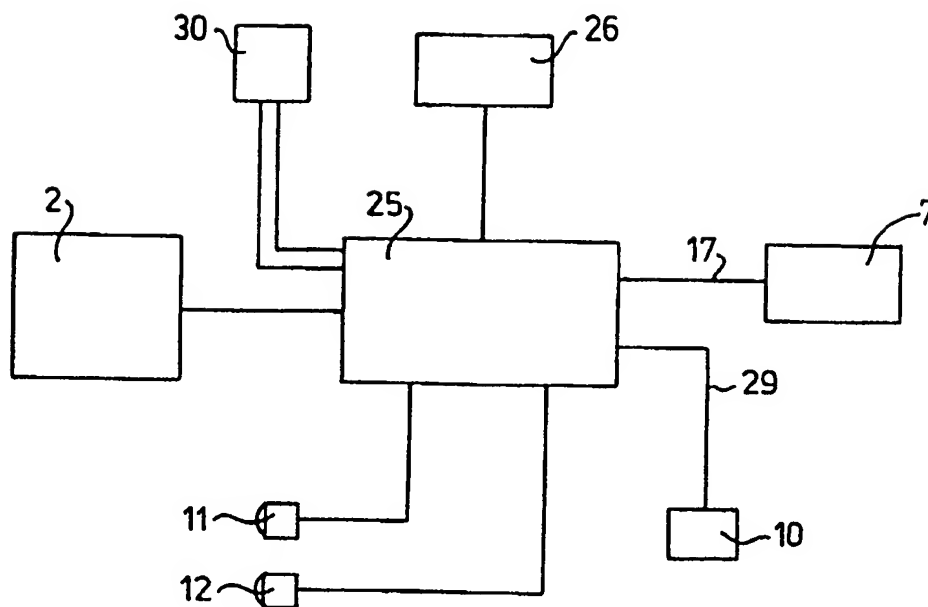

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 95/00146

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B65D83/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,3 666 144 (WINDER) 30 May 1972 cited in the application see column 2, line 1 - column 4, line 34; figures 1-2	1,7,8
Y	CH,A,681 038 (COSMOS ENTWICKLUNGS- UND FORSCHUNGSANSTALT) 31 December 1992 see column 1, line 53 - line 59; figures 1-3	1,7,8
A	GB,A,2 248 888 (KONTROL AIR NEW ZEALAND LTD.) 22 April 1992 see page 1, line 2 - line 7; figures 1-3 see page 5 - page 6	1,7,8
A	GB,A,2 172 125 (STC PLC) 10 September 1986 see page 2, line 93 - line 107; figures 1-3	3

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 June 1995

Date of mailing of the international search report

10.07.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vollering, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 95/00146

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3666144	30-05-72	AU-B- 456469	19-12-74
		AU-A- 3675171	14-06-73
		CA-A- 940888	29-01-74
		DE-A- 2161032	15-06-72
		FR-A- 2117658	21-07-72
CH-A-681038	31-12-92	DE-C- 3905759	29-03-90
		DE-A- 4004099	30-08-90
		AU-A- 5172190	26-09-90
		AU-A- 5175190	26-09-90
		CH-A- 675461	28-09-90
		WO-A- 9010119	07-09-90
		WO-A- 9010120	07-09-90
		EP-A- 0384006	29-08-90
GB-A-2248888	22-04-92	NZ-A- 235725	27-09-94
		AU-B- 659805	01-06-95
		AU-A- 8584591	30-04-92
GB-A-2172125	10-09-86	NONE	